General Description

The SJH30P043 uses advanced trench technology to provide excellent R_{DS(ON)}, low gate charge and operation with gate voltages as low as -4.5V. This device is suitable for use as a wide variety of applications.

Features


- Low Gate Charge
- 100% UIS Tested, 100% DVDS Tested
- High Power and current handing capability
- Lead free product is acquired

Application

- PWM Applications
- Load Switch
- Power Management

Key Performance Parametes

Parameter	Value	Unit
V _{DS}	-30	V
R _{DS(ON)_TYP}	4.9	mΩ
I _D	-81	А
Q _G	40.9	nC

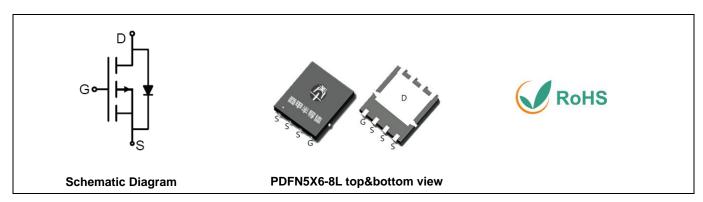

Package Marking and Ordering Information

Device/Ordering Code	Marking	Package	Packing	Reel Size	Tape width	Quantity
SJH30P043	SJH30P043	PDFN5X6-8L	Tape	\	/	5000 Pcs

Table 1. Absolute Maximum Ratings (T_C=25℃ unless otherwise noted)

Symbol	Parameter	Limit	Unit
V _{DS}	Drain-Source Voltage (V _{GS} =0V)	-30	V
V_{GS}	Gate-Source Voltage (V _{DS} =0V)	±20	V
1-	Drain Current-Continuous(Tc=25°C)	-81	А
I _D	Drain Current-Continuous(T _C =100℃)	-51	А
IDM (pluse)	Drain Current-Continuous@ Current-Pulsed (Note 1)	-324	А
D	Maximum Power Dissipation(T _C =25°C)	68	W
P _D Maximum Power Dissipation(T _C =100°C)		27	W
Eas	Avalanche energy (Note 2)	400	mJ
TJ, TSTG	Operating Junction and Storage Temperature Range	-55 To 150	င

Table 2. Thermal Characteristic

Symbol	Parameter	Тур	Max	Unit
R _{0JC} Thermal Resistance, Junction-to-Case			1.85	°C/W



Table 3. Electrical Characteristics ($T_J=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
On/Off States						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =-250μA	-30			V
	7 0 1 1/1 2 1 0 1	V _{DS} =-30V, V _{GS} =0V T _J =25℃			-1	μA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V T _J =125℃			-100	μA
Igss	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V			±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1		-2.2	V
g FS	Forward Transconductance	V _{DS} =-5V, I _D =-10A		42		S
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-20A T _J =25℃		4.9	6.4	mΩ
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-4.5V, I _D =-20A T _J =25°C		6.8	9.1	mΩ
Dynamic Chara	acteristics			•		I.
Ciss	Input Capacitance			4994		pF
C_{oss}	Output Capacitance	V _{DS} =-20V,V _{GS} =0V, f=1.0MHz		410		рF
C _{rss}	Reverse Transfer Capacitance			221		pF
Rg	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1.0MHz		8		Ω
Switching Para	meters			•		I.
t _{d(on)}	Turn-on Delay Time			13		nS
t _r	Turn-on Rise Time	V _{GS} =-10V, V _{DS} =-30V,		115		nS
$t_{d(off)}$	Turn-Off Delay Time	R_L =4Ω, R_{GEN} =6Ω		78		nS
t _f	Turn-Off Fall Time			86		nS
Q_g	Total Gate Charge			40.9		nC
Q _{gs}	Gate-Source Charge	V _{GS} =-10V, V _{DS} =-15V, I _D =-20A		9.9		nC
Q_{gd}	Gate-Drain Charge			14.3		nC
Source-Drain D	Diode Characteristics			1		
I _{SD}	Source-Drain Current (Body Diode)				-81	А
V _{SD}	Forward on Voltage (Note 3)	V _{GS} =0V, I _S =-10A			-1.2	V
t _{rr}	Reverse Recovery Time	I _F =-10A, dI/dt=-100A/μs		13		ns
Qrr	Reverse Recovery Charge	I _F =-10A, dI/dt=-100A/μs		8		nC
	•	•				


Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature.


Notes 2.E_{AS} condition: $T_J=25^{\circ}C$, $V_{DD}=-30V$, $V_{G}=-10V$, $Rg=25\Omega$, L=0.5mH.


Notes 3.Repetitive Rating: Pulse width limited by maximum junction temperature.




Typical Electrical And Thermal Characteristics (Curves)

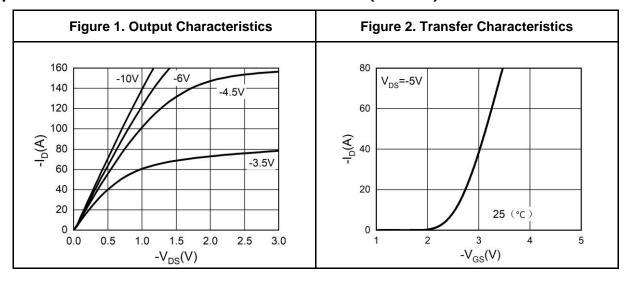


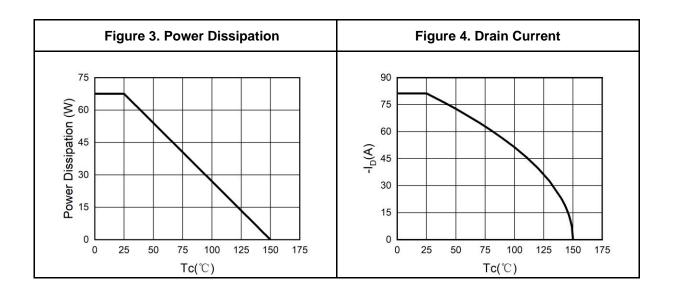

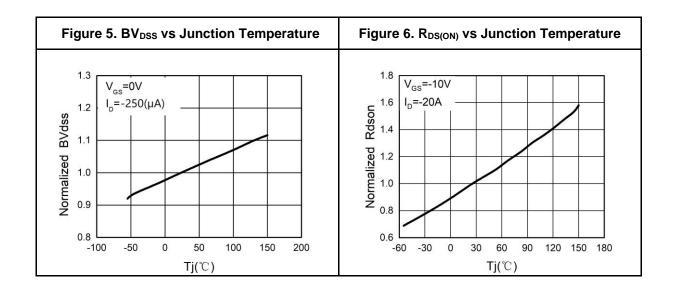



Typical Electrical And Thermal Characteristics (Curves)

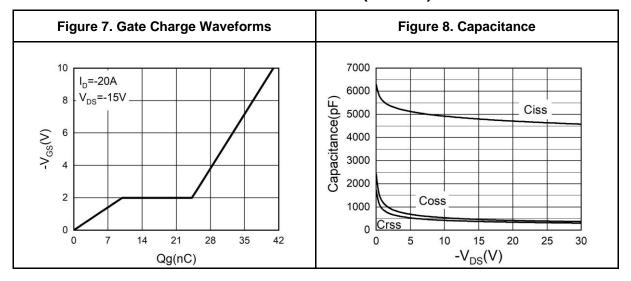

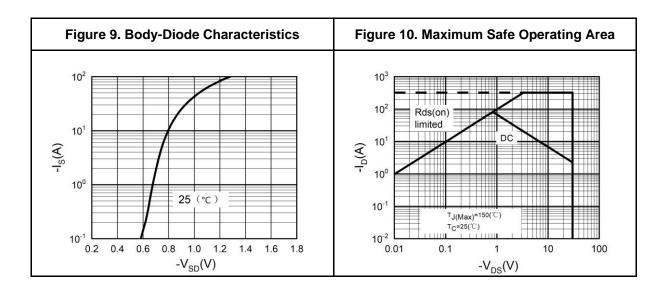


PDFN5X6-8L Package Information





SYMBOL.	MILLIMETER				
SIMDOL	MIN	Тур.	MAX		
A	0. 900	1.000	1. 100		
A1		0. 254 REF.			
A2		0~0.05			
D	4. 824	4. 900	4. 976		
D1	3. 910	4. 010	4. 110		
D2	4. 924	5.000	5. 076		
E	5. 924	6.000	6.076		
E1	3. 375	3. 475	3. 575		
E2	5. 674	5. 750	5. 826		
b	0. 350	0.400	0.450		
e	1.270 TYP.				
L	0. 534	0.610	0.686		
L1	0. 424	0.500	0. 576		
L2	1.800 REF.				
k	1. 190	1. 290	1. 390		
Н	0. 549	549 0.625 0.70			
θ	8°	10°	12°		
ф	1.100	1. 200	1.300		
d			0. 100		



Symbol	MILLIMETER					
	Min.	Тур.	Max.			
А	0.900	1.000	1.100			
A1		0.254 REF.				
A2		0~0.05				
D	4.824	4.900	4.976			
D1	3.910	4.010	4.110			
D2	4.924	5.000	5.076			
Е	5.924	6.000	6.076			
E1	3.375	3.475	3.575			
E2	5.674	5.75	5.826			
b	0.350	0.400 0.450				
е	1.270 TYP.					
L	0.534	0.610	0.686			
L1	0.424	0.500	0.576			
L2		1.800 REF.				
k	1.190	1.290	1.390			
Н	0.549	0.625	0.701			
θ	8°	10°	12°			
Ф	1.100	1.200	1.300			
d			0.100			

Attention

This product described in this document can not be used in life support devices or systems, aircraft's control systems, and other applications whose failure can be reasonably expected to result in serious physical and/or material damage, apart from that when an application agreement is signed between customer and Wuxi Shangjia Semiconductor.

The performances and characteristics of this product in the independent testing state are displayed in this document. Wuxi Shangjia Semiconductor can't guarantee of the performances and characteristics of this described product that mounted in the customer's products or equipments as same as that in the independent testing state. So the customer should evaluate and test devices mounted in the customer's products or equipments.

Wuxi Shangjia Semiconductor reserves the right to improve the designs, functions and reliability of this product and modify any and all information described in this document without notice customer, apart from that when an notice agreement is signed between customer and Wuxi Shangjia Semiconductor.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Wuxi Shangjia Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.