



30V N&P-Channel Trench Power MOSFET

General Description

The SJP30NP310 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as $\pm 4.5V$. This device is suitable for use as a wide variety of applications.

Features


- Low Gate Charge
- High Power and current handing capability
- Lead free product is acquired

Application

- Battery Protection
- Power Management
- Load Switch

Key Performance Parametes

Parameter	Value	Value	Unit
V_{DS}	30	-30	V
$R_{DS(ON_TYP)}$	12.8	15.4	m Ω
I_D	8.8	-11.7	A
Q_G	9.5	20	nC

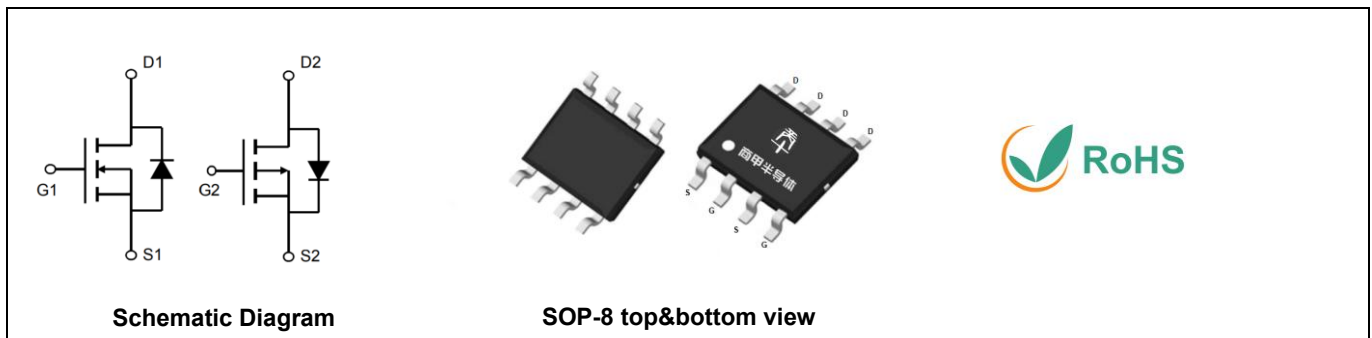

Package Marking and Ordering Information

Device/Ordering Code	Marking	Package	Packing	Reel Size	Tape width	Quantity
SJP30NP310	SJP30NP310	SOP-8	Tape	\	\	4000 Pcs

Table 1. Absolute Maximum Ratings ($T_A=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	N Limit	P Limit	Unit
V_{DS}	Drain-Source Voltage ($V_{GS}=0V$)	30	-30	V
V_{GS}	Gate-Source Voltage ($V_{DS}=0V$)	± 20	± 20	V
I_D	Drain Current-Continuous($T_A=25^{\circ}C$)	8.8	-11.7	A
	Drain Current-Continuous($T_A=100^{\circ}C$)	5.6	-7.4	A
I_{DM} (pulse)	Drain Current-Continuous@ Current-Pulsed (Note 1)	35.2	-46.8	A
P_D	Maximum Power Dissipation($T_A=25^{\circ}C$)	2	4.2	W
	Maximum Power Dissipation($T_A=100^{\circ}C$)	0.8	1.7	W
E_{AS}	Avalanche energy (Note 2)	36	110	mJ
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 To 150		$^{\circ}C$

Table 2. Thermal Characteristic

Symbol	Parameter	N Max	P Max	Unit
$R_{\theta JA}$	Thermal Resistance, Junction-to- Ambient	64	30	$^{\circ}C/W$



30V N&P-Channel Trench Power MOSFET

Table 3. N-Channel Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
On/Off States						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =250μA	30			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V T _J =25℃			1	μA
		V _{DS} =30V, V _{GS} =0V T _J =125℃			100	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V			±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0		2.5	V
g _{FS}	Forward Transconductance	V _{DS} =5V, I _D =4A		7		S
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =4A T _J =25℃		12.8	16	mΩ
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =4.5V, I _D =3A T _J =25℃		21.4	28.5	mΩ
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =15V, V _{GS} =0V, f=1.0MHz		488		pF
C _{oss}	Output Capacitance			76		pF
C _{rss}	Reverse Transfer Capacitance			58		pF
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1.0MHz		1.5		Ω
Switching Parameters						
t _{d(on)}	Turn-on Delay Time	V _{GS} =10V, V _{DS} =15V, R _L =3.75Ω, R _{GEN} =3Ω		4.5		nS
t _r	Turn-on Rise Time			11		nS
t _{d(off)}	Turn-Off Delay Time			14.5		nS
t _f	Turn-Off Fall Time			2.5		nS
Q _g	Total Gate Charge	V _{GS} =10V, V _{DS} =15V, I _D =4A		9.5		nC
Q _{gs}	Gate-Source Charge			1.6		nC
Q _{gd}	Gate-Drain Charge			1.7		nC
Source-Drain Diode Characteristics						
I _{SD}	Source-Drain Current (Body Diode)				8.8	A
V _{SD}	Forward on Voltage (Note 3)	V _{GS} =0V, I _S =4A			1.2	V
t _{rr}	Reverse Recovery Time	I _F =4A, dI/dt=500A/μs		8		ns
Q _{rr}	Reverse Recovery Charge	I _F =4A, dI/dt=500A/μs		2		nC

Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature.


Notes 2.EAS condition: $T_J=25^{\circ}\text{C}, V_{DD}=30V, V_G=10V, R_g=25\Omega, L=0.5\text{mH}$.

Notes 3.Repetitive Rating: Pulse width limited by maximum junction temperature.



30V N&P-Channel Trench Power MOSFET


N-Channel Typical Electrical And Thermal Characteristics (Curves)

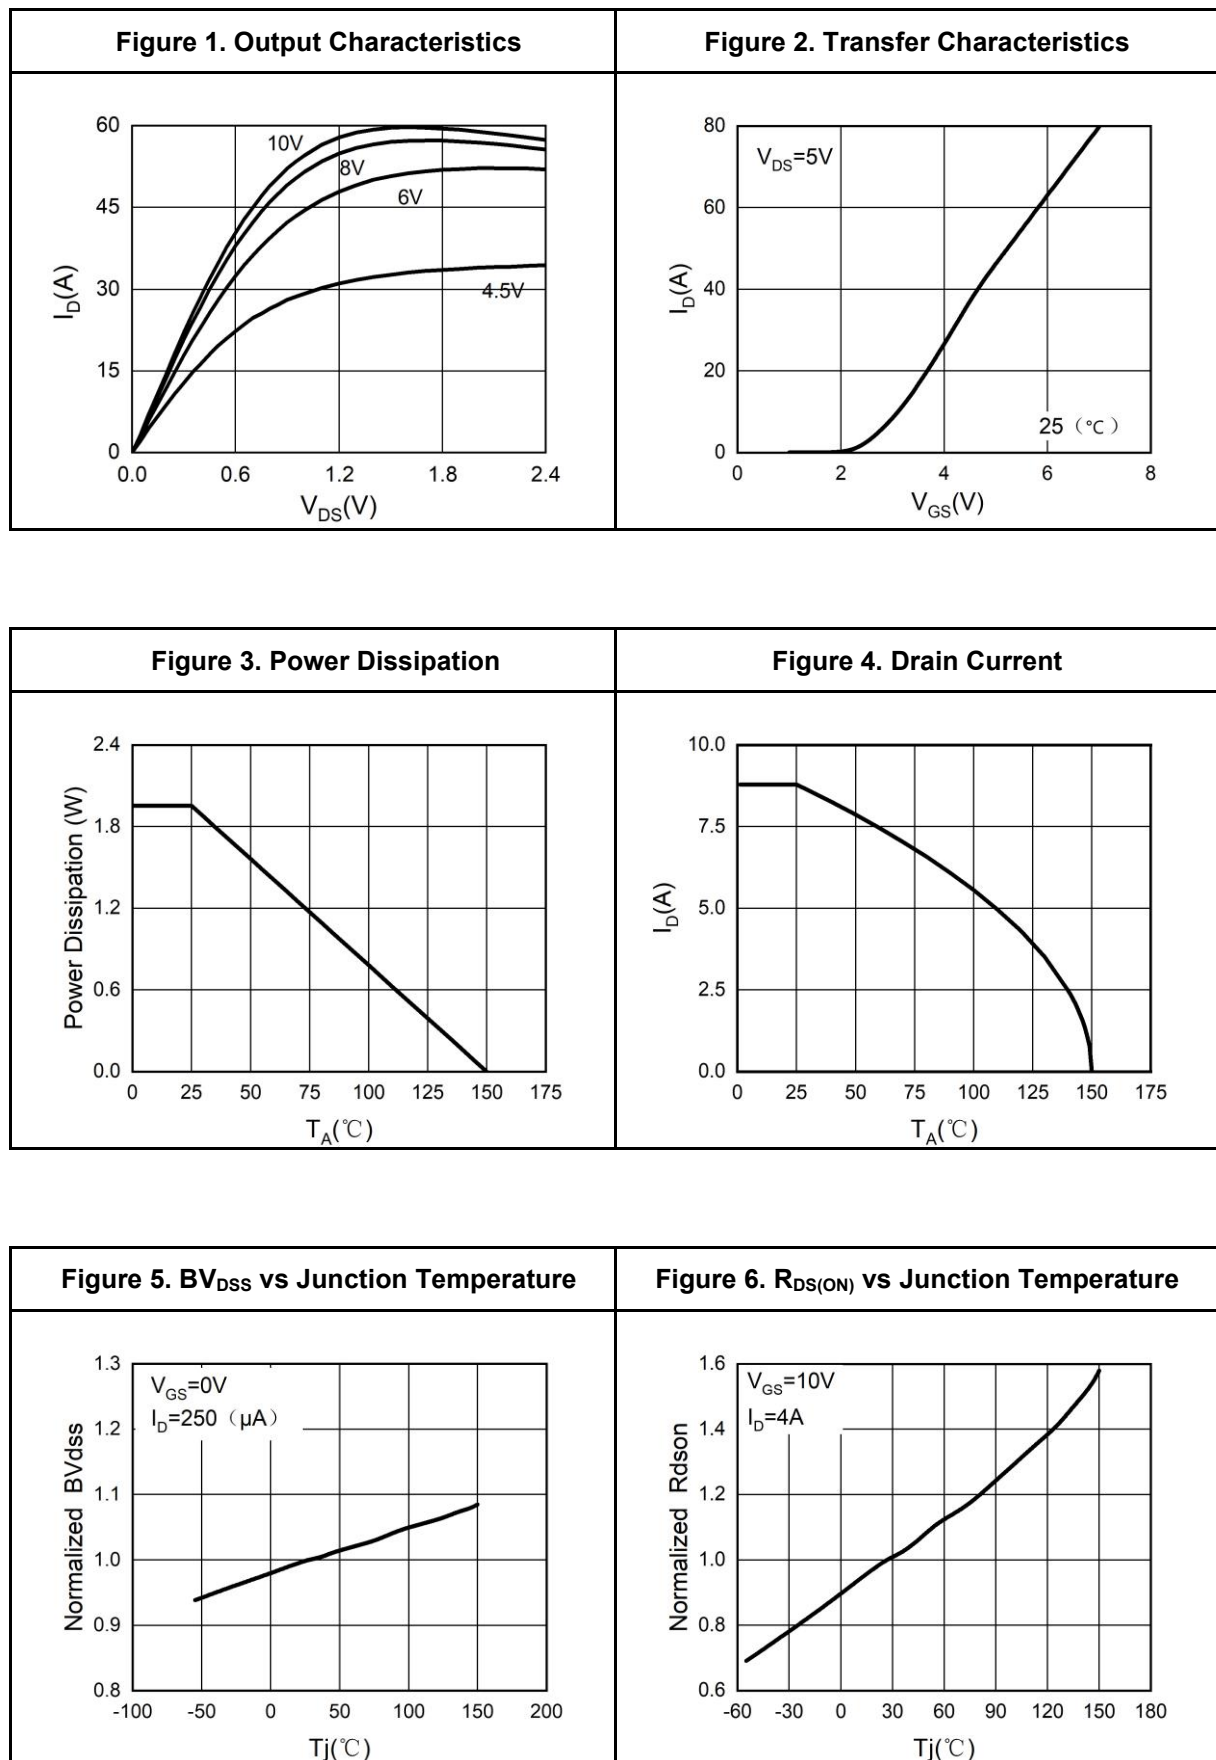



30V N&P-Channel Trench Power MOSFET

N-Channel Typical Electrical And Thermal Characteristics (Curves)

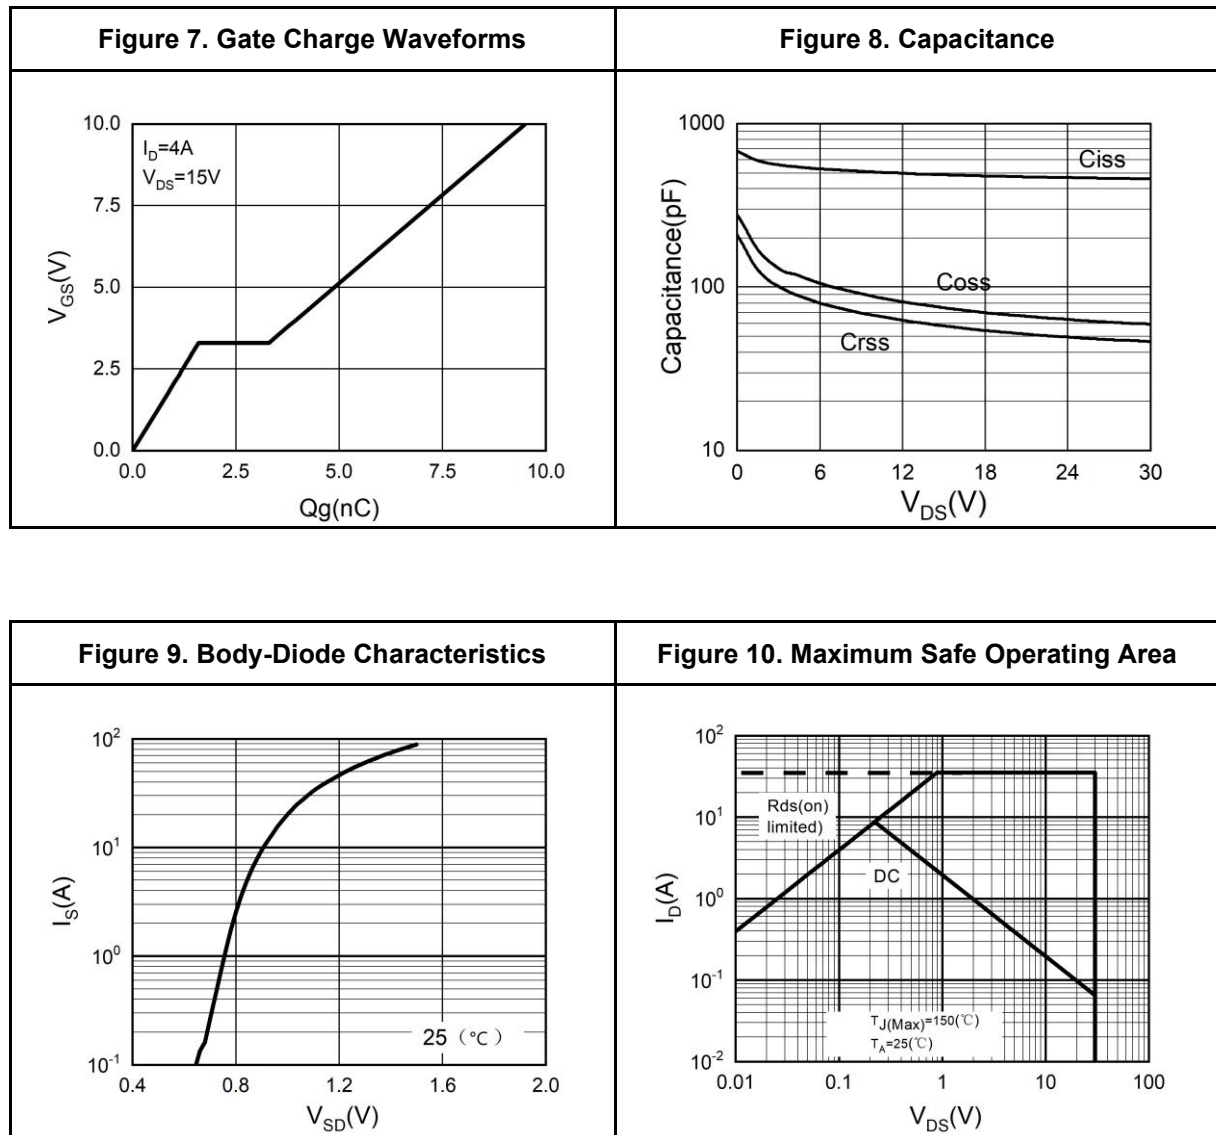



30V N&P-Channel Trench Power MOSFET

Table 4. P-Channel Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
On/Off States						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =-250μA	-30			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V T _J =25℃			-1	μA
		V _{DS} =-30V, V _{GS} =0V T _J =125℃			-100	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V			±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1		-2.5	V
g _{FS}	Forward Transconductance	V _{DS} =-5V, I _D =-10A		14		S
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-10A T _J =25℃		15.4	19.3	mΩ
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-4.5V, I _D =-5A T _J =25℃		22	29.3	mΩ
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =-15V,V _{GS} =0V, f=1.0MHz		1630		pF
C _{oss}	Output Capacitance			174		pF
C _{rss}	Reverse Transfer Capacitance			155		pF
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1.0MHz		5.6		Ω
Switching Parameters						
t _{d(on)}	Turn-on Delay Time	V _{GS} =-10V, V _{DS} =-15V, R _L =1.5Ω, R _{GEN} =3Ω		5		nS
t _r	Turn-on Rise Time			5.5		nS
t _{d(off)}	Turn-Off Delay Time			49		nS
t _f	Turn-Off Fall Time			37		nS
Q _g	Total Gate Charge	V _{GS} =-10V, V _{DS} =-15V, I _D =-10A		20		nC
Q _{gs}	Gate-Source Charge			3.5		nC
Q _{gd}	Gate-Drain Charge			4		nC
Source-Drain Diode Characteristics						
I _{SD}	Source-Drain Current (Body Diode)				-11.7	A
V _{SD}	Forward on Voltage (Note 3)	V _{GS} =0V, I _S =-10A			-1.2	V
t _{rr}	Reverse Recovery Time	I _F =-10A, dI/dt=500A/μs		13		ns
Q _{rr}	Reverse Recovery Charge	I _F =-10A, dI/dt=500A/μs		4		nC

Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature.




Notes 2.EAS condition: $T_J=25^{\circ}\text{C}, V_{DD}=-30V, V_G=-10V, R_g=25\Omega, L=0.5\text{mH}$.

Notes 3.Repetitive Rating: Pulse width limited by maximum junction temperature.



30V N&P-Channel Trench Power MOSFET


P-Channel Typical Electrical And Thermal Characteristics (Curves)

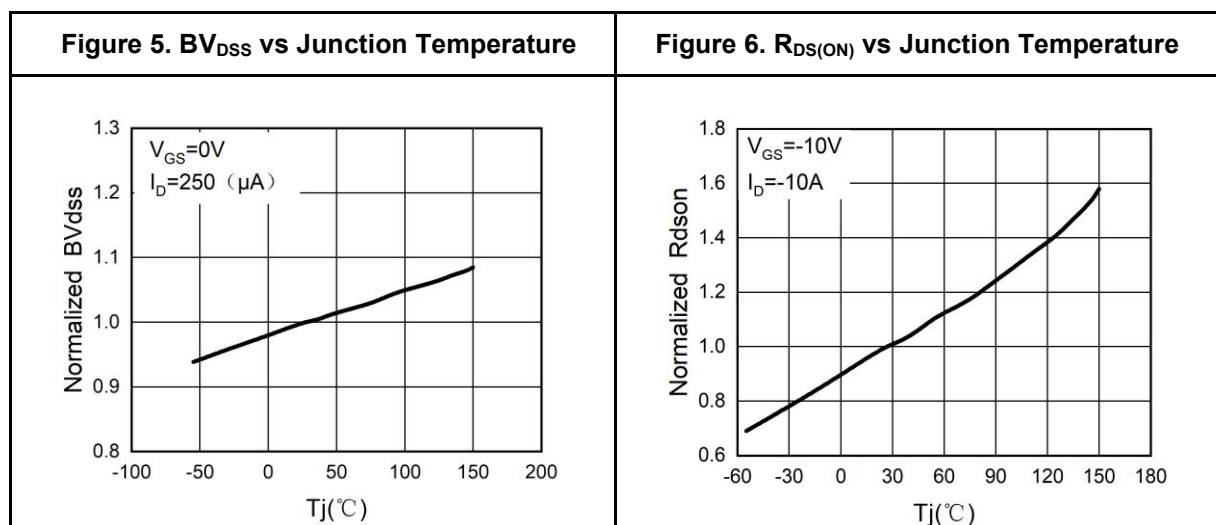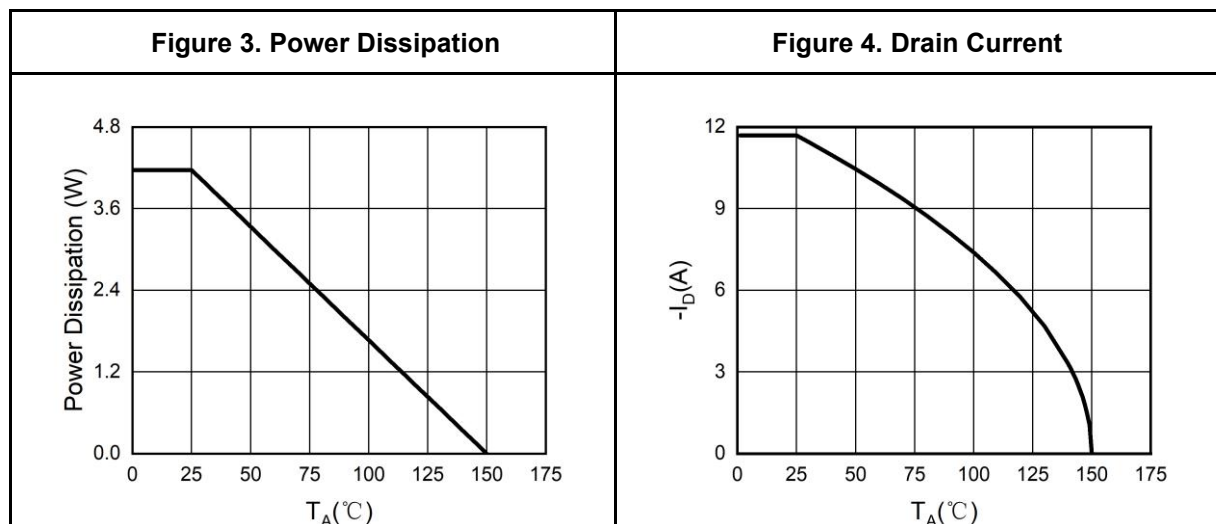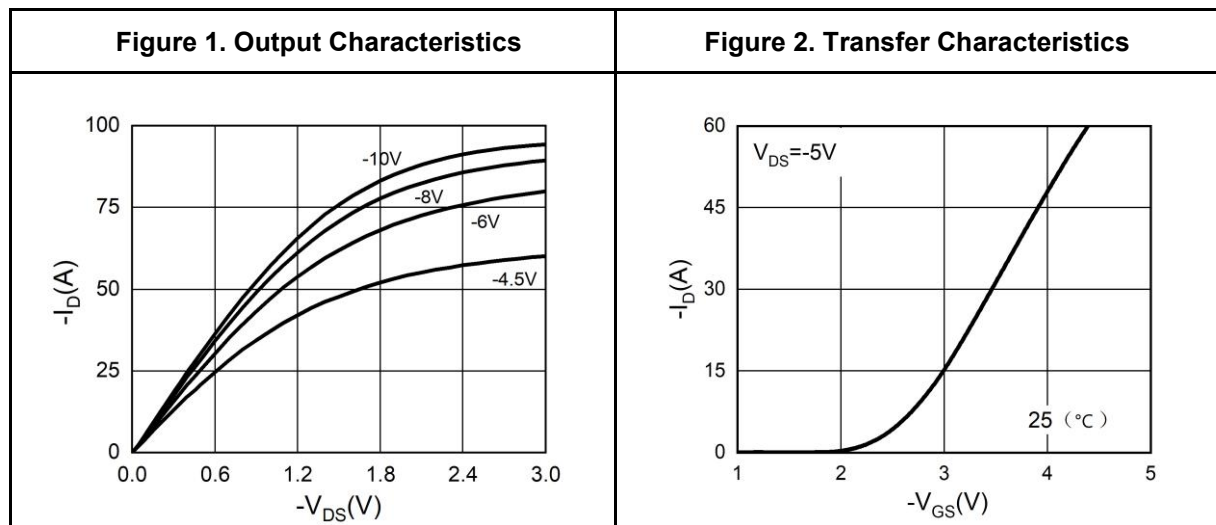




30V N&P-Channel Trench Power MOSFET

P-Channel Typical Electrical And Thermal Characteristics (Curves)

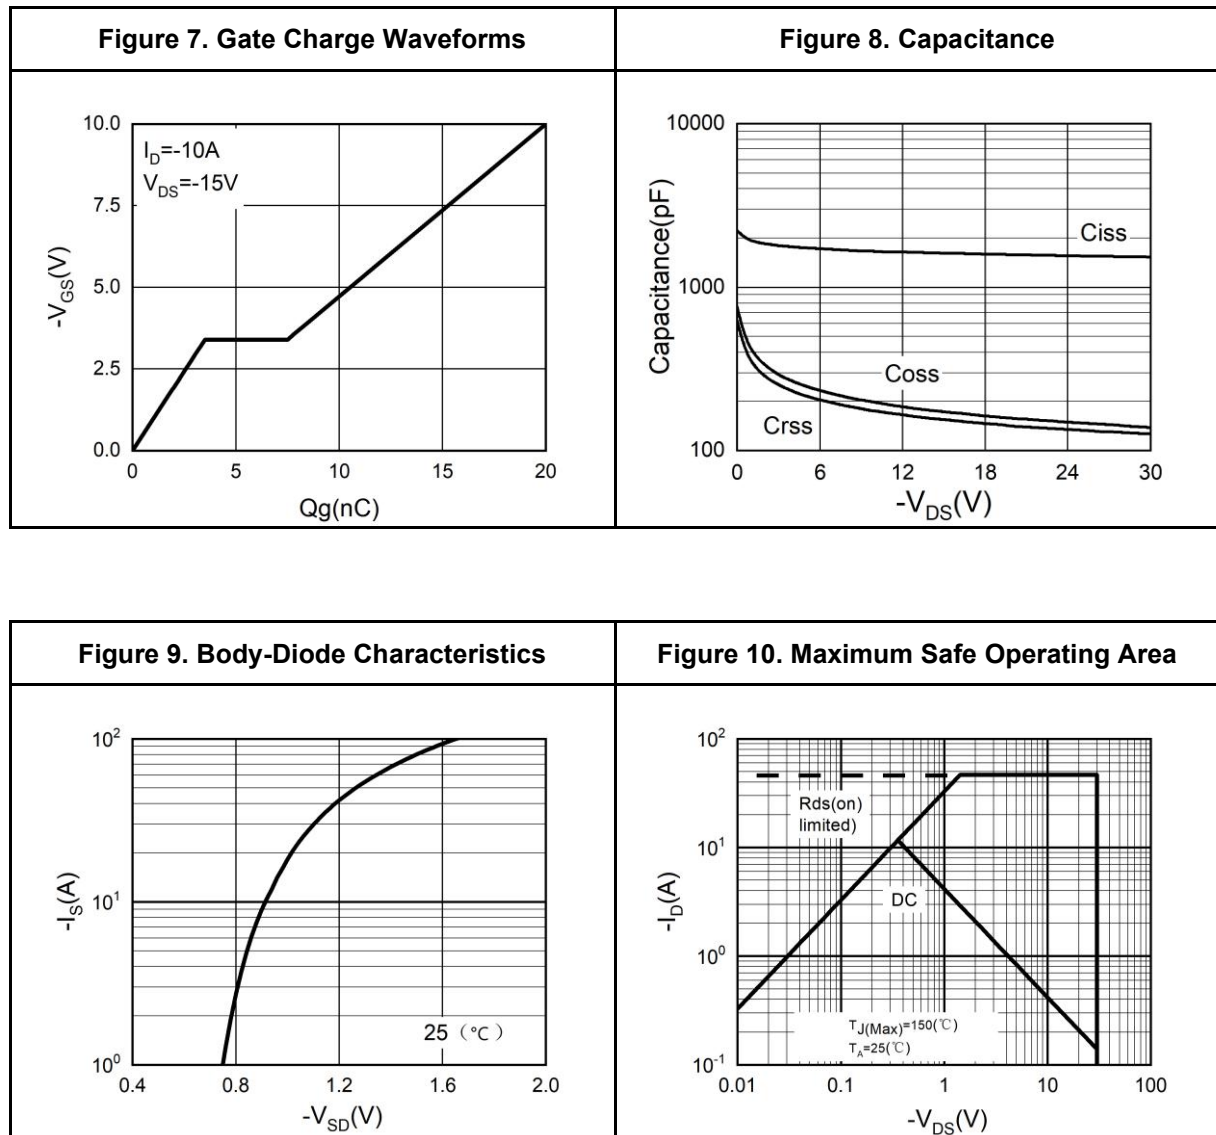



SOP-8 Package Information

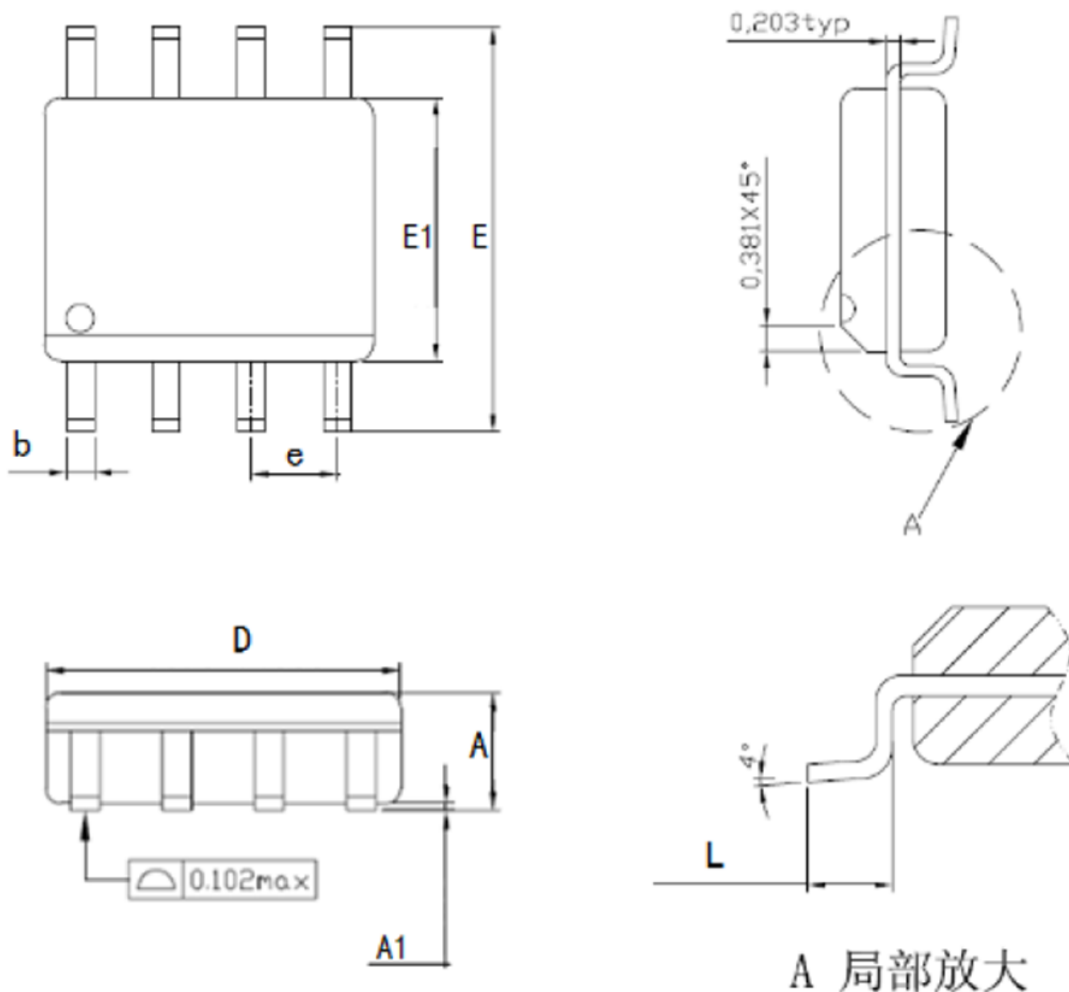

Symbol	Dimensions In Millimeters		
	Min.	Nom.	Max
A	1.35	1.55	1.75
A1	0.1	0.15	0.2
b	0.346	0.406	0.466
D	4.8	4.89	4.98
E	5.75	6.00	6.25
E1	3.81	3.90	3.99
e	1.27TYP		
L	0.406	0.838	1.27



Attention

This product described in this document can not be used in life support devices or systems, aircraft's control systems, and other applications whose failure can be reasonably expected to result in serious physical and/or material damage, apart from that when an application agreement is signed between customer and Wuxi Shangjia Semiconductor.

The performances and characteristics of this product in the independent testing state are displayed in this document. Wuxi Shangjia Semiconductor can't guarantee of the performances and characteristics of this described product that mounted in the customer's products or equipments as same as that in the independent testing state. So the customer should evaluate and test devices mounted in the customer's products or equipments.

Wuxi Shangjia Semiconductor reserves the right to improve the designs, functions and reliability of this product and modify any and all information described in this document without notice customer, apart from that when an notice agreement is signed between customer and Wuxi Shangjia Semiconductor.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Wuxi Shangjia Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.