



100V P-Channel Trench Power MOSFET

General Description

The SJL01P2200 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as -4.5V. This device is suitable for use as a wide variety of applications.

Features


- Low Gate Charge
- 100% UIS Tested, 100% DVDS Tested
- High Power and current handling capability
- Lead free product is acquired

Application


- PWM Applications
- Load Switch
- Power Management

Key Performance Parametes

Parameter	Value	Unit
V_{DS}	-100	V
$R_{DS(ON_TYP)}$	278	m Ω
I_D	-2	A
Q_G	19.6	nC



Schematic Diagram



SOT-89-3L top&bottom view



Package Marking and Ordering Information

Device/Ordering Code	Marking	Package	Packing	Reel Size	Tape width	Quantity
SJL01P2200	SJL01P2200	SOT89-3L	Tape	\	\	1000 Pcs

Table 1. Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Limit	Unit
V_{DS}	Drain-Source Voltage ($V_{GS}=0V$)	-100	V
V_{GS}	Gate-Source Voltage ($V_{DS}=0V$)	± 20	V
I_D	Drain Current-Continuous($T_A=25^\circ\text{C}$)	-2	A
	Drain Current-Continuous($T_A=100^\circ\text{C}$)	-1.2	A
I_{DM} (pluse)	Drain Current-Continuous@ Current-Pulsed (Note 1)	-8	A
P_D	Maximum Power Dissipation($T_A=25^\circ\text{C}$)	3.1	W
	Maximum Power Dissipation($T_A=100^\circ\text{C}$)	1.25	W
E_{AS}	Avalanche energy (Note 2)	109	mJ
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 To 150	$^\circ\text{C}$

Table 2. Thermal Characteristic

Symbol	Parameter	Typ	Max	Unit
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient		40	$^\circ\text{C/W}$



100V P-Channel Trench Power MOSFET

Table 3. Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
On/Off States						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =-250μA	-100			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-200V, V _{GS} =0V T _J =25℃			-1	μA
		V _{DS} =-200V, V _{GS} =0V T _J =125℃			-100	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V			±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1		-2.5	V
g _{FS}	Forward Transconductance	V _{DS} =-5V, I _D =-1A		10		S
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-1A T _J =25℃		278	361	mΩ
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-4.5V, I _D =-1A T _J =25℃		297	395	mΩ
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =-50V, V _{GS} =0V, f=1.0MHz		1198		pF
C _{oss}	Output Capacitance			33.6		pF
C _{rss}	Reverse Transfer Capacitance			28.3		pF
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1.0MHz		5.1		Ω
Switching Parameters						
t _{d(on)}	Turn-on Delay Time	V _{GS} =-10V, V _{DS} =-50V, R _L =50Ω, R _{GEN} =3Ω		132		nS
t _r	Turn-on Rise Time			3.7		nS
t _{d(off)}	Turn-Off Delay Time			41		nS
t _f	Turn-Off Fall Time			6.2		nS
Q _g	Total Gate Charge	V _{GS} =-10V, V _{DS} =-50V, I _D =-1A		19.6		nC
Q _{gs}	Gate-Source Charge			6		nC
Q _{gd}	Gate-Drain Charge			4.2		nC
Source-Drain Diode Characteristics						
I _{SD}	Source-Drain Current (Body Diode)				-2	A
V _{SD}	Forward on Voltage (Note 3)	V _{GS} =0V, I _S =-1A			-1.2	V
t _{rr}	Reverse Recovery Time	I _F =-1A, dI/dt=100A/μs		43		ns
Q _{rr}	Reverse Recovery Charge	I _F =-1A, dI/dt=100A/μs		83.8		nC

Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature.


Notes 2.EAS condition: $T_J=25^{\circ}\text{C}, V_{DD}=50V, V_{GS}=-10V, R_g=25\Omega, L=0.5\text{mH}$.

Notes 3.Repetitive Rating: Pulse width limited by maximum junction temperature.



100V P-Channel Trench Power MOSFET


Typical Electrical And Thermal Characteristics (Curves)

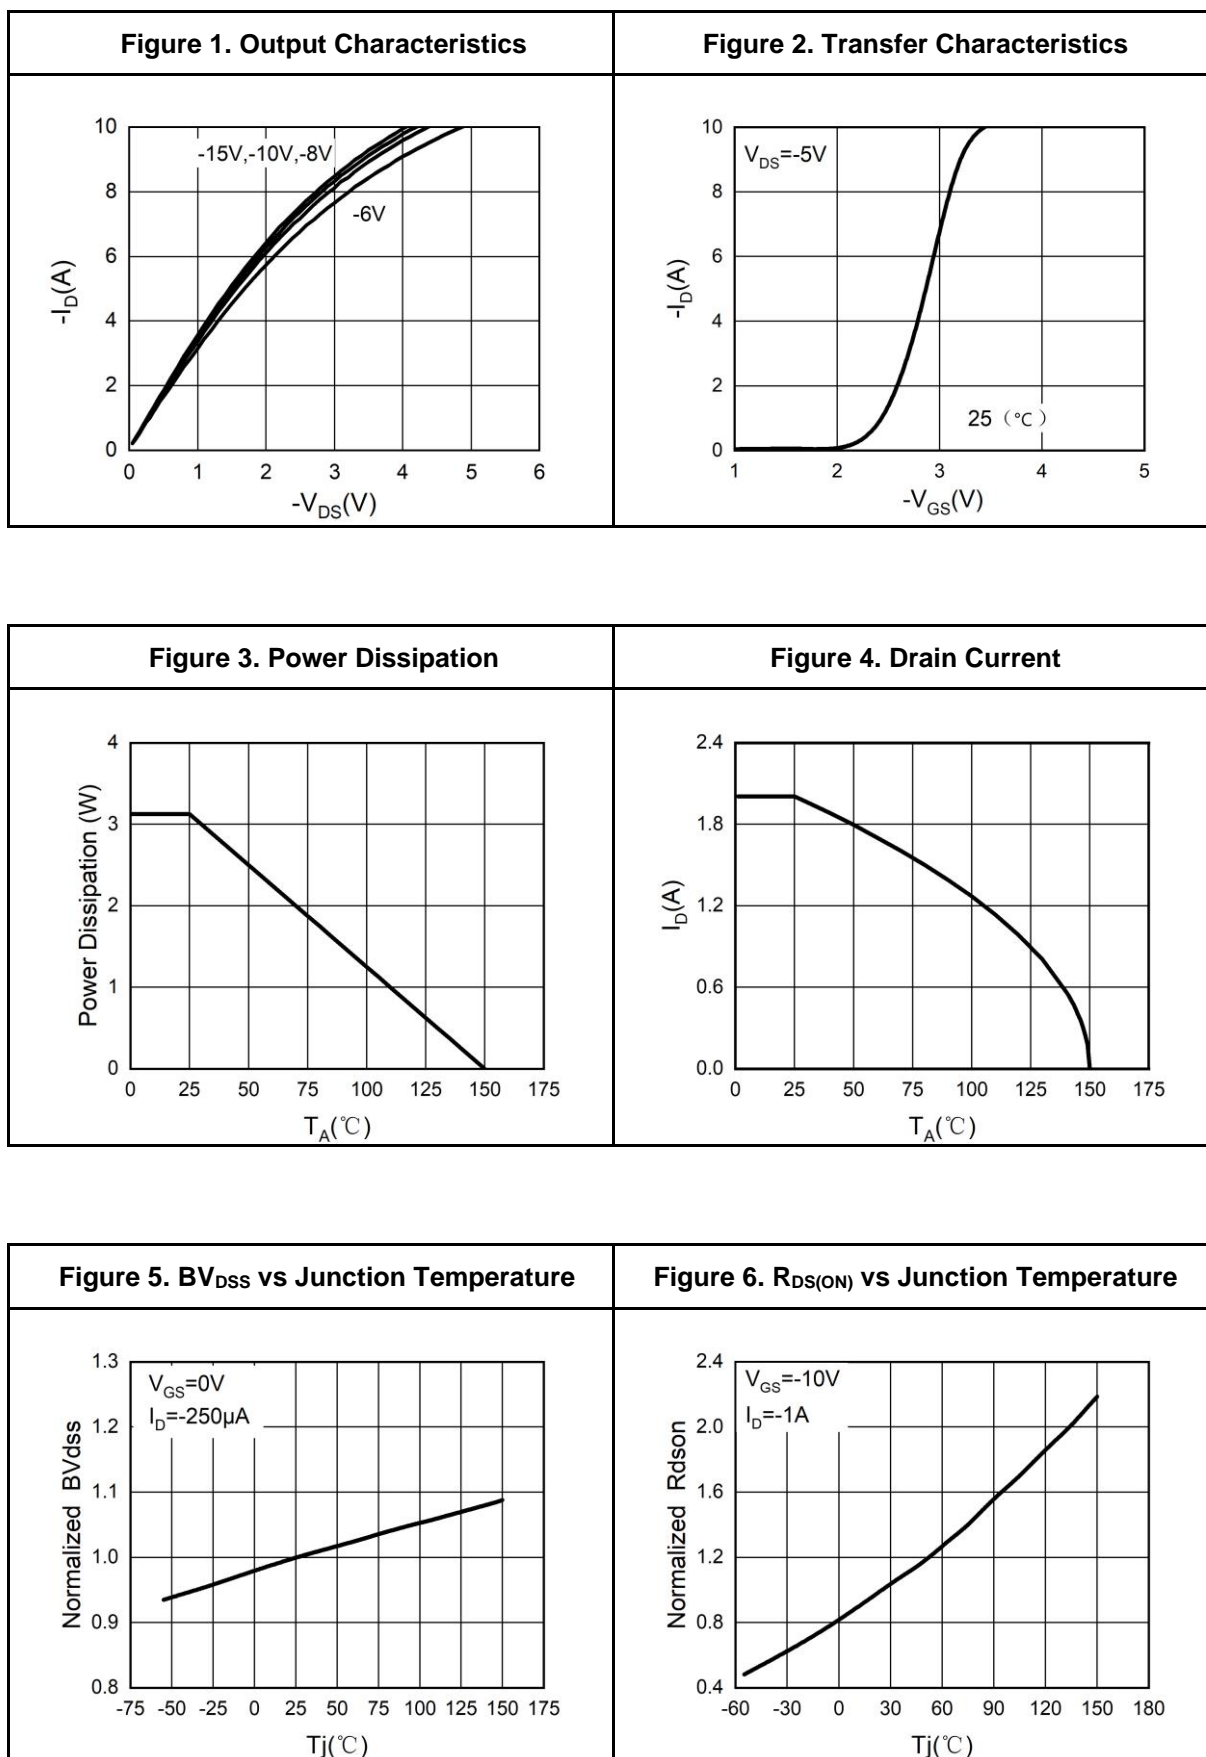




100V P-Channel Trench Power MOSFET

Typical Electrical And Thermal Characteristics (Curves)

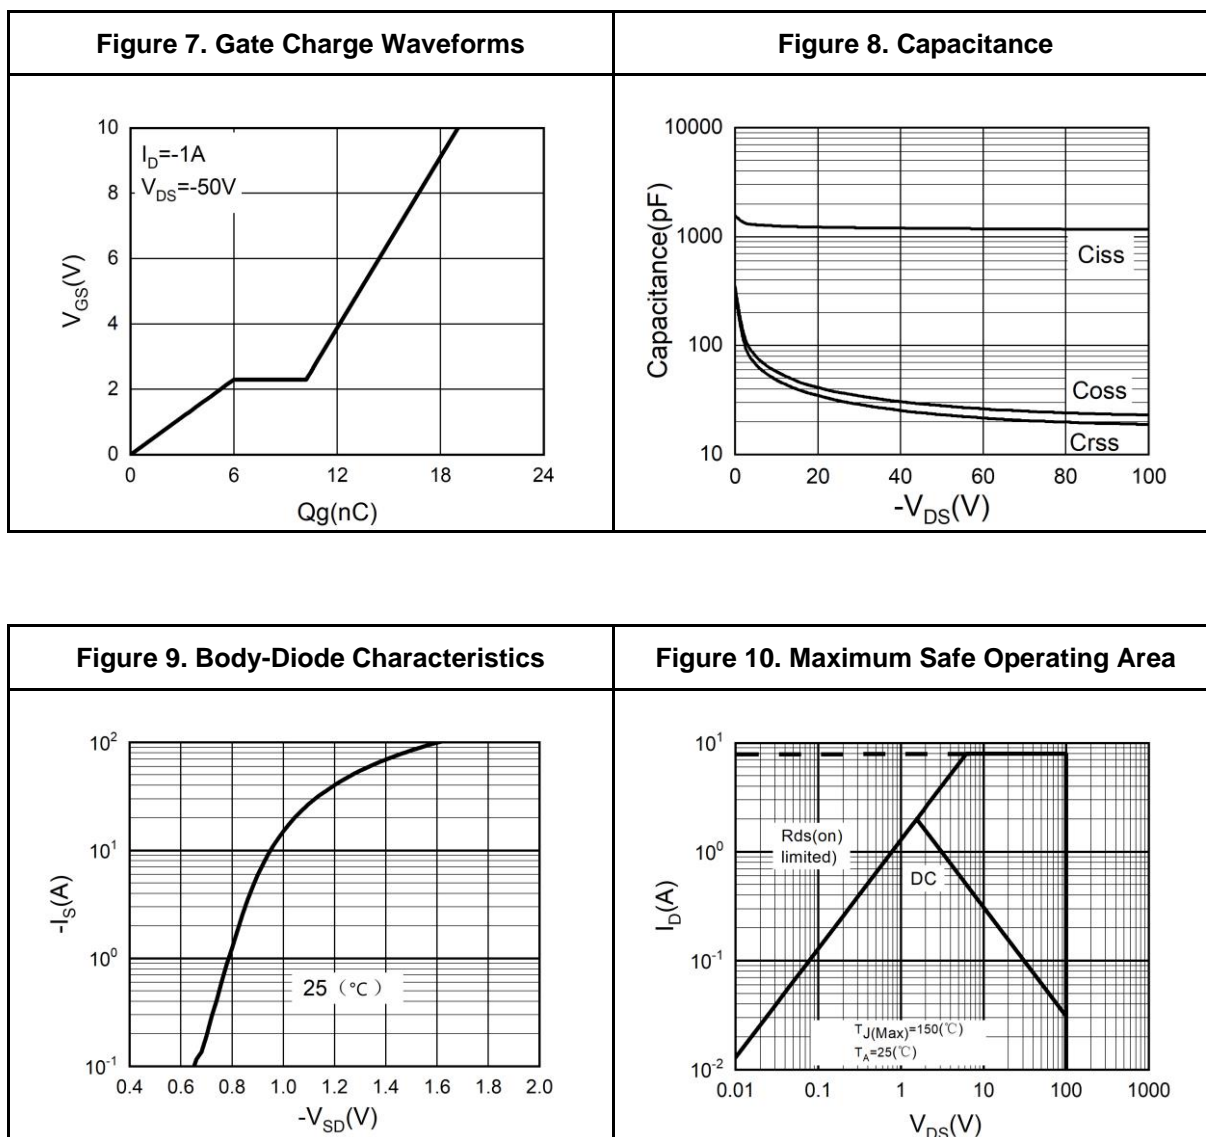



SOT-89-3L Package Information

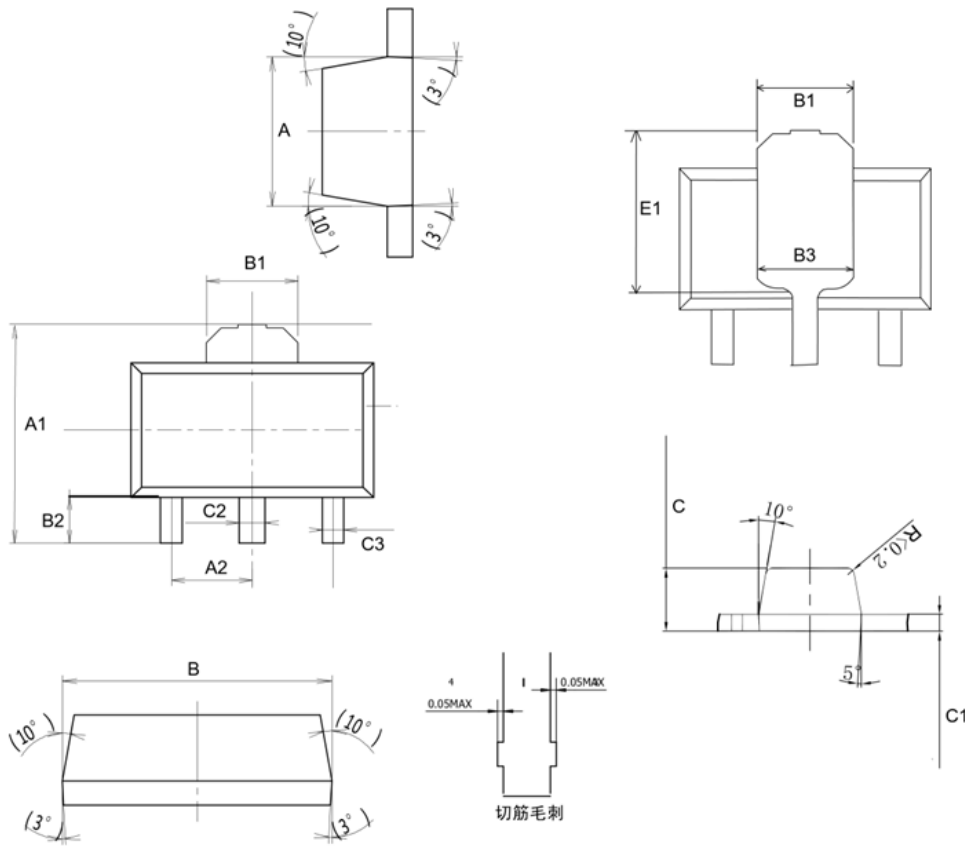

COMMON DIMENSIONS UNITS: MEASURE=MILLIMETER			
SYMBOL	MIN	MID	MAX
A	2.35	2.45	2.55
A1	4.135	4.235	4.335
A2	1.45	1.50	1.55
B	4.40	4.50	4.60
B1		1.55 REF	
B2	0.95	1.00	1.05
B3		1.63 REF	
C	1.45	1.50	1.55
C1	0.39	0.40	0.41
C2	0.4	0.48	0.55
C3	0.35	0.4	0.45
E1	2.65	2.75	2.85



100V P-Channel Trench Power MOSFET

Attention

This product described in this document can not be used in life support devices or systems, aircraft's control systems, and other applications whose failure can be reasonably expected to result in serious physical and/or material damage, apart from that when an application agreement is signed between customer and Linde Semiconductor.

The performances and characteristics of this product in the independent testing state are displayed in this document. Linde Semiconductor can't guarantee of the performances and characteristics of this described product that mounted in the customer's products or equipments as same as that in the independent testing state. So the customer should evaluate and test devices mounted in the customer's products or equipments.

Linde Semiconductor reserves the right to improve the designs, functions and reliability of this product and modify any and all information described in this document without notice customer, apart from that when an notice agreement is signed between customer and Linde Semiconductor.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Linde Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.